

NVIZN[®]

IDENTIFICATION DISPLAYS




LED PROGRAMMABLE IDENTIFICATION DISPLAY

**5 YEAR
LIMITED
WARRANTY**

**VISIBLE UP TO
1500ft/457m!**

VID-1C24-24V-x (x = LED color)

24 IN

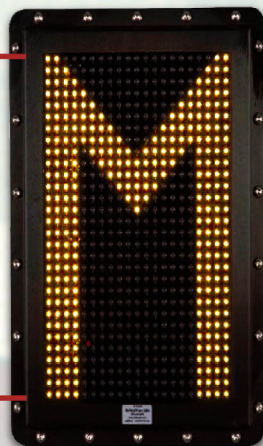

VID-1C24-24V-A (shown above)

FULLY FUNCTIONAL
all letters A-Z!

Conveniently changes the
digits (0 to 9) or characters
(all letters A-Z), using
magnetic switches



FEATURES & BENEFITS:

RS232
Communications Options

IP RATED
IP66/IP67

- ▶ **1 Character 24" LED, Programmable**
- ▶ **5 Year Limited Warranty**
- ▶ **Advanced Technology for *Maximum Visibility* & 24 Hour use!**
 - ▶ Automatically dims for Night use & avoiding glare. **Brightens** for Daytime use.
 - ▶ **Locking Technology:** Once programmed, do not need reprogramming upon shut down/startup.
 - ▶ **Secure Protection Technology:** Ensures safe-site operation by preventing VID's from displaying incorrect characters.
- ▶ **Built to Survive Extreme Environments:**
 - ▶ Black Aerospace Grade Aluminum - Super sealed
 - ▶ Advanced Temperature Controlled LEDS - *Shock* and *Vibration* Resistant
 - ▶ Impact Resistance & Withstands Power-Hose Cleaning
- ▶ **Reverse Polarity Protected:**
 - ▶ Built-in Circuit Protection for over-voltage, voltage surges or spikes
- ▶ **Lightweight and Easy to Install**
- ▶ **Operating temperatures ranging from -50°C (-58°F) to +60°C (140°F)**

FORM & FIT COMPATIBLE TO:



LED Reflective
Identification Displays
VID-BL1C24-BKY
(Reflective Fluorescent
Yellow Green)



LED Reflective
Identification Displays
VID-BL1C24-BKW
(Reflective White)



LED Reflective
Identification Displays
VID-BL1C24-ABK
(Reflective Fluorescent
Yellow)

* Also Available in Characters

Other LED Colors Available
Upon Request!

ID DISPLAY SPECIFICATIONS CHART:

Available in 110VAC & 220VAC upon request

Part Number	Character Height	Weight	Frame Dimensions		Volts (VDC)	Amps	Watts
			Height	Width			
VID-1C24-24V (1 character)	24" 609.6 (mm)	21 LBS 9.5 (kg)	31.65" 803.91 (mm)	17.25" 438.15 (mm)	12	3.0	36
					24	1.5	36

★ NVIZN Signs field proven for over 12 years!

**LED Identification Displays are intended for use on various types of equipment.
Hardware needed for mounting purposes is at the discretion of the user.

Recommended Mounting Options:

VID Brackets, Pre-Drilled



VID-S24-2

*Other size brackets
available upon request

Power Converter



VID-110-240V PS
(110-240VAC)

Power Cord Splitters
(to combine multiple signs)



VID-PC-EXT24-2Y VID-PC-EXT24-3Y

Power Cords



VID-PC-EXT-50-1 VID-PC-EXT-50-2

DS-NVIZN-VID-1C24-24V-RevC
Release Date: 3/06/2018

ADDRESS:

2115 W. Mountain View Rd.
Phoenix, AZ 85021 USA

2677 192nd St. #107
Surrey, BC V3Z 3X1 CANADA

For More Information Call or Visit Us Online Today!

USA

T: 602.424.2500

F: 602.424.9777

E: Sales@DriverIndustrial.com

CAN

T: 604.560.5080

F: 604.560.5090

E: SalesCanada@SafetyWhips.com